

**MDT Shutter Actuator 2/4/8-fold, MDRC**  
**MDT Shutter Actuator 1-fold, flush mounted**

Version		
JAL-0206.01	Shutter Actuator 2-fold	2SU MDRC, 6A, shutter motors 230VAC up to 300W
JAL-0410.01	Shutter Actuator 4-fold	4SU MDRC, 10A, shutter motors 230VAC up to 600W
JAL-0810.01	Shutter Actuator 8-fold	8SU MDRC, 10A, shutter motors 230VAC up to 600W
JAL-0410D.01	Shutter Actuator 4-fold	4SU MDRC, 8A, shutter motors 24VDC up to 180W
JAL-0810D.01	Shutter Actuator 8-fold	8SU MDRC, 8A, shutter motors 24VDC up to 180W
JAL-01UP.01	Shutter Actuator 1-fold	Flush mounted, 6A, shutter motors 230VAC up to 300W

The MDT Shutter Actuator receives KNX/EIB telegrams and controls up to 8 independent shutter or sunblind drives. Each output uses two monostable relays. The MDRC shutter Actuators can be operated manually via a push button.

The outputs are parameterized individually via ETS3/4. The device provides extensive functions like status response, block functions, central function and positioning shutters, blinds and other hangings. Additionally the device provides up to 8 scenes per channel. If the mains voltage fails, all outputs are switched off. After bus voltage failure or recovery the position of the shutter is selected in dependence on the parameterization.

For 24VDC motors it is necessary to use the JAL-0x10D.01 with commutator circuit.

The MRDC Shutter Actuators use a common power supply terminal for two channels. The flush mounted MDT Shutter Actuator has a common power supply terminal. This feature simplifies the wiring and increases clarity of the circuit.

The MDT Shutter Actuator is available as modular installation device and flush mounted device for fixed installation in dry rooms.

For project design and commissioning of the MDT Shutter Actuator it is recommended to use the ETS3f/ETS4 or later. Please download the application software at [www.mdt.de/Downloads.html](http://www.mdt.de/Downloads.html)


JAL-0410.01



JAL-0206.01



JAL-01UP.01

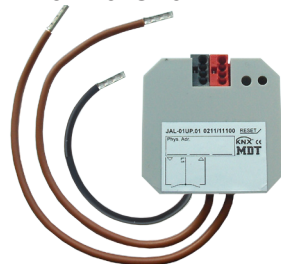


- Push Button and LED indicator for each channel ( Only MDRC device)
- Operation mode blind/shutter programmable
- Travel-, pause-at-change-of-direction and step time adjustable
- 1-bit automatic function and sun protection
- 8-bit positioning for shutter and blinds
- 8 scenes per channel
- Alarm, central- and block functions
- Separate travel time for up and down adjustable
- Tip operation for accurate positioning
- Programmable behavior in case of bus voltage failure or return
- Two contacts share one supply phase (MDRC device)
- Common supply phase (UP device)
- Integrated bus coupling unit
- 3 years warranty

Technical Data	JAL-0410.01 JAL-0810.01	JAL-0410D.01 JAL-0810D.01	JAL-0206.01 JAL-01UP.01
Number of channels	4/8	4/8	1/2
Output switching ratings			
Ohmic load	10A	8A	6A
Voltage	230VAC	24VDC	230VAC
Maximum load			
Shutter motor*	600W	180W	300W
Output life expectancy (mechanical)	1.000.000	1.000.000	1.000.000
Max. fuse per channel	16A	10A	10A
Permitted wire gauge			
Screw terminal	0,5 - 4,0mm <sup>2</sup> solid core 0,5 - 2,5mm <sup>2</sup> finely stranded	0,5 - 4,0mm <sup>2</sup> solid core 0,5 - 2,5mm <sup>2</sup> finely stranded	0,5 - 4,0mm <sup>2</sup> solid core 0,5 - 2,5mm <sup>2</sup> finely stranded
KNX busconnection terminal	0,8mm Ø, solid core	0,8mm Ø, solid core	0,8mm Ø, solid core
Power Supply	230VAC/50Hz	230VAC/50Hz	KNX bus
Power consumption KNX bus typ.	< 0,15W	< 0,15W	< 0,3W
Power consumption mains 230VAC typ.	< 0,3W	< 0,3W	--
Operation temperature range	0 to + 45°C	0 to + 45°C	0 to + 45°C
Enclosure	IP 20	IP 20	IP 20
Dimensions MDRC (Space Units)	4/8SU	4/8SU	2SU
Dimensions UP (W x H x D)	--	--	41mm x 41mm x 24mm

\* no three-phase asynchronous motor

Exemplary circuit diagram JAL-0410.01

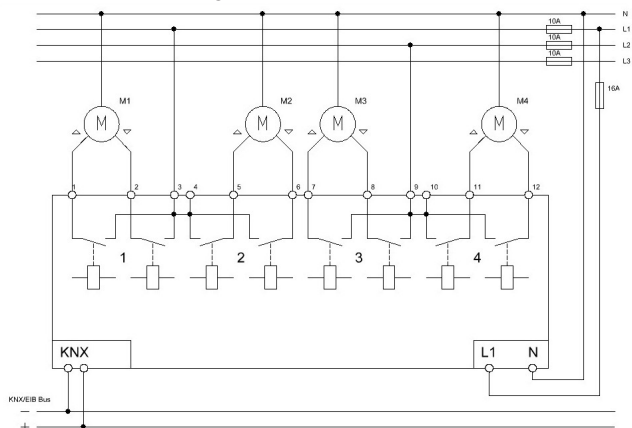

Exemplary circuit diagram JAL-0410D.01

